


# Data Sheet

Itemnumber..... 5522000250

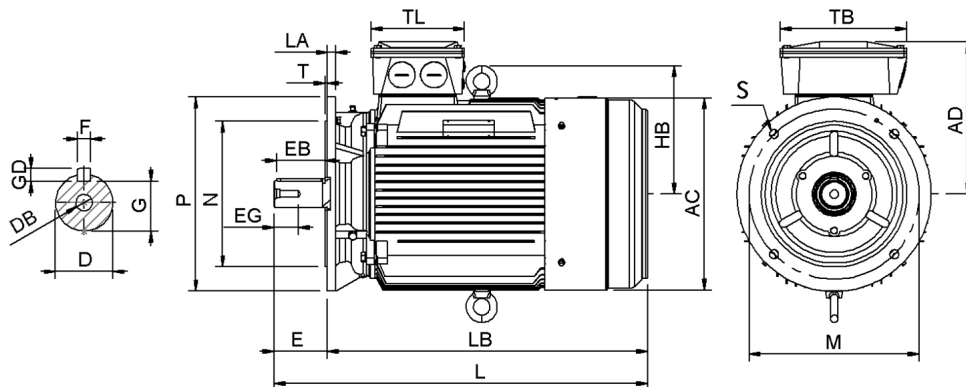

AC = 396	DB = M20	EG = 50	GD = 10	LA = 17	N = 300	T = 5
AD = 313	E = 110	F = 16	HB = 264	LB = 659	P = 400	TB = 260
D = 55	EB = 100	G = 49	L = 769	M = 350	S = 4-Ø18,5	TL = 192

## Version

Type..... HMC3 200L1-2  
Design..... Induction motor  
Standard series..... IEC 60034  
Phase / Voltage range..... 3~ / Low

## Electrical design

Efficiency..... IE3  
Pole..... 2  
Power at 50 Hz (kW)..... 30,0  
Hz..... 50  
Voltage..... 230VD/400VY  
Winding voltage..... 230VD/400VY 50 Hz  
Power output (kW)..... 30,0  
Duty..... S1  
Insulation class..... F  
Temperature rise..... B

## Motor protection

Thermal protection main.... PTC 3x 155 dgr  
Thermal protection second.. None  
Space heater..... None  
Temperature detector..... No  
SPM..... No  
IR wire..... No  
Tropical insulation..... No

## Explosion protection

According to..... None  
Type of protection..... None

## General

Direction of rotation..... CW  
Painting..... RAL 9005  
Nameplate..... Multivoltage  
Special packing..... No  
Special requirements..... No

## Mechanical design

Frame size..... 200  
Mounting..... B5  
Rain cap..... No  
Protection class..... IP55  
Cooling method..... IC411/TEFC  
External grounding..... Yes  
Drain hole..... Yes  
Frame material..... Cast Iron  
Material approval..... None  
Shaft..... IEC standard  
Key..... Closed key  
Balancing..... Half key balancing  
Vibration class..... Grade-A  
Weight (kg)..... 241

## Environment condition

Ambient temp. min. (°C).. -20  
Ambient temp. max. (°C).. 40  
Altitude (mtr up to)..... 1000

## Bearing

DE Bearing..... 6312/C3  
NDE Bearing..... 6312/C3  
Fixed bearing..... DE

## Terminal box

Tbox position..... Top  
Cable entry direction..... Right (from DE)  
Cable entry  
Main..... 2 x M50x1,5  
Plastic blindcaps  
Accessory..... 2 x M20x1,5  
Plastic blindcaps  
Terminal board thread..... 6-M8

## Test values

Rotor inertia (kgm²)..... 0,18  
Noise level (dB(A))..... 81  
No load current (A)..... 13,4  
Winding resist. (ohm)..... 0,064  
Starting time (sec.)..... 0,24  
Temp. rise winding (K)..... 51  
Temp. rise surface (K)..... 31

Rated power (kW)	30,0	29,0	36,0	35,0
Frequency (Hz)	50	50	60	60
Voltage (V)	230 400	220 380	280 480	440
Connection	D Y	D Y	D Y	Y
Full load current (A)	88,5 51,0	91,0 52,5	88,5 51,0	52,5
Speed (rpm)	2970	2970	3550	3550
Power factor cos(phi)	0,91	0,92	0,91	0,92
Efficiency, 100/75/50 (%)	93,3/ 93,5 /92,1	93,3/ 93,5 /92,1	93,3/ 93,5 /92,1	92,8/ 93,1 /91,5
Ist/In	8,55	7,50	8,55	7,85
Full load torque (Nm)	96,5	93,5	96,5	93,5
Tst/Tn	2,90	2,70	2,90	2,50
Tmax/Tn	3,05	2,80	3,05	2,60
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45