


Data Sheet

Itemnumber..... 5523551400

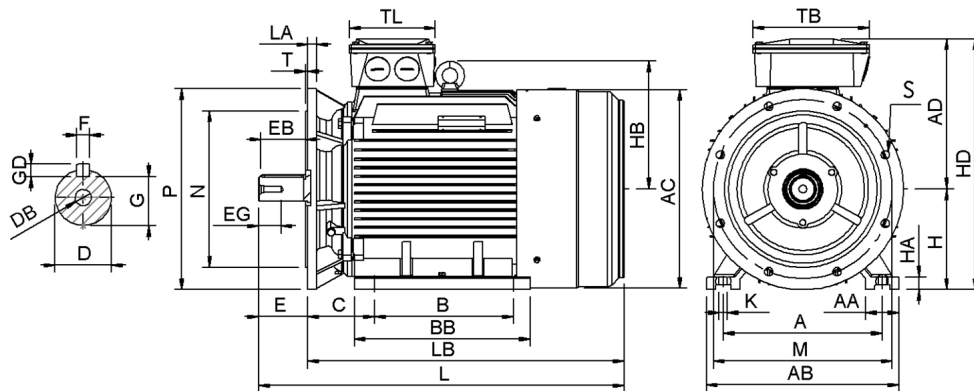

| | | | | | | | | | | |
|----------|----------|----------|----------|-----------|---------|-----------|-----------|---------|-----------|----------|
| A = 610 | AC = 699 | BB = 750 | DB = M24 | EG = 56 | GD = 12 | HB = 489 | L = 1507 | M = 740 | S = 8-Ø24 | TL = 330 |
| AA = 116 | AD = 664 | C = 254 | E = 140 | F = 20 | H = 355 | HD = 1019 | LA = 25 | N = 680 | T = 6 | |
| AB = 726 | B = 630 | D = 75 | EB = 130 | G = 67,50 | HA = 52 | K = 28 | LB = 1367 | P = 800 | TB = 460 | |

Version

Type..... HMC3 355L1-2
Design..... Induction motor
Standard series..... IEC 60034
Phase / Voltage range..... 3~ / Low

Electrical design

Efficiency..... IE3
Pole..... 2
Power at 50 Hz (kW)..... 315
Hz..... 50
Voltage..... 400VD/690VY
Winding voltage..... 400VD/690VY 50 Hz
Power output (kW)..... 315
Duty..... S1
Insulation class..... F
Temperature rise..... B

Mechanical design

Frame size..... 355
Mounting..... B35
Rain cap..... No
Protection class..... IP55
Cooling method..... IC411/TEFC
External grounding..... Yes
Drain hole..... Yes
Frame material..... Cast Iron
Material approval..... None
Shaft..... IEC standard
Key..... Closed key
Balancing..... Half key balancing
Vibration class..... Grade-A
Weight (kg)..... 1.830

Environment condition

Ambient temp. min. (°C)..... -20
Ambient temp. max. (°C)..... 40
Altitude (mtr up to)..... 1000

Bearing

DE Bearing..... 6319/C3
NDE Bearing..... 6319/C3
Fixed bearing..... DE

Terminal box

Tbox position..... Top
Cable entry direction..... Right (from DE)
Cable entry
Main..... 2 x M72x2,0
Metal blindcaps
Accessory..... 2 x M20x1,5
Metal blindcaps
Terminal board thread..... 6-M16

Test values

Rotor inertia (kgm²)..... 4,20
Noise level (dB(A))..... 96
No load current (A)..... 108
Winding resist. (ohm)..... 0,0063
Starting time (sec.)..... 0,87
Temp. rise winding (K)..... 71
Temp. rise surface (K)..... 43

Motor protection

Thermal protection main..... PTC 3x 155 dgr
Thermal protection second.. None
Space heater..... None
Temperature detector..... No
SPM..... No
IR wire..... No
Tropical insulation..... No

Explosion protection

According to..... None
Type of protection..... None

General

Direction of rotation..... CW
Painting..... RAL 9005
Nameplate..... Multivoltage
Special packing..... No
Special requirements..... No

| | | | | |
|---------------------------|------------------|------------------|------------------|------------------|
| Rated power (kW) | 315 | 305 | 380 | 365 |
| Frequency (Hz) | 50 | 50 | 60 | 60 |
| Voltage (V) | 400 690 | 380 660 | 480 830 | 440 |
| Connection | D Y | D Y | D Y | D |
| Full load current (A) | 520 305 | 540 310 | 520 305 | 540 |
| Speed (rpm) | 2980 | 2980 | 3580 | 3580 |
| Power factor cos(phi) | 0,91 | 0,91 | 0,91 | 0,92 |
| Efficiency, 100/75/50 (%) | 95,8/ 96,2 /96,0 | 95,8/ 96,2 /96,0 | 95,8/ 96,2 /96,0 | 95,5/ 95,9 /95,7 |
| Ist/In | 6,60 | 5,80 | 6,60 | 6,05 |
| Full load torque (Nm) | 1.000 | 980 | 1.000 | 980 |
| Tst/Tn | 1,68 | 1,56 | 1,68 | 1,46 |
| Tmax/Tn | 2,30 | 2,14 | 2,30 | 2,00 |
| Duty | S1 | S1 | S1 | S1 |
| Ambient temp. (°C) | 40 | 45 | 40 | 45 |