


# Data Sheet

Itemnumber..... 5541320409

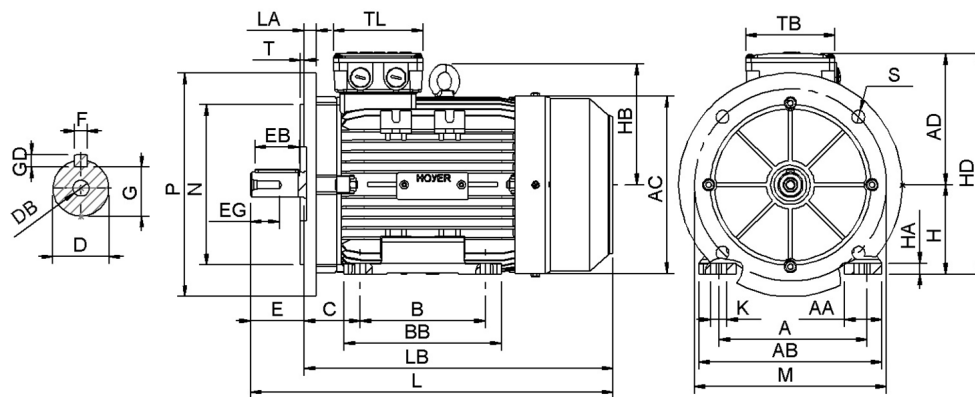

A = 216	AC = 258	BB = 180	DB = M12	EG = 30	GD = 8	HB = 165	L = 463	M = 265	S = 4-Ø14,5	TL = 120
AA = 50	AD = 187	C = 89	E = 80	F = 10	H = 132	HD = 319	LA = 15	N = 230	T = 4	
AB = 256	B = 140	D = 38	EB = 70	G = 33	HA = 16,50	K = 12	LB = 383	P = 300	TB = 120	

## Version

Type..... HMA3 132S-4  
Design..... Induction motor  
Standard series..... IEC 60034  
Phase / Voltage range..... 3~ / Low

## Electrical design

Efficiency..... IE3  
Pole..... 4  
Power at 50 Hz (kW)..... 5,50  
Hz..... 50  
Voltage..... 400VD/690VY  
Winding voltage..... 400VD/690VY 50 Hz  
Power output (kW)..... 5,50  
Duty..... S1  
Insulation class..... F  
Temperature rise..... B

## Mechanical design

Frame size..... 132  
Mounting..... B35  
Rain cap..... No  
Protection class..... IP55  
Cooling method..... IC411/TEFC  
External grounding..... Yes  
Drain hole..... Yes  
Frame material..... Aluminium  
Material approval..... None  
Shaft..... IEC standard  
Key..... Closed key  
Balancing..... Half key balancing  
Vibration class..... Grade-A  
Weight (kg)..... 52,9

## Environment condition

Ambient temp. min. (°C)..... -20  
Ambient temp. max. (°C)..... 40  
Altitude (mtr up to)..... 1000

## Bearing

DE Bearing..... 6308-ZZ/C3  
NDE Bearing..... 6308-ZZ/C3  
Fixed bearing..... DE

## Terminal box

Tbox position..... Top  
Cable entry direction..... Right (from DE)  
Cable entry  
Main..... 2 x M25x1,5  
Plastic blindcaps  
Accessory..... 1 x M20x1,5  
Plastic blindcap  
Terminal board thread..... 6-M5

## Motor protection

Thermal protection main..... PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater..... None  
Temperature detector..... No  
SPM..... No  
IR wire..... No  
Tropical insulation..... No

## Explosion protection

According to..... None  
Type of protection..... None

## General

Direction of rotation..... CW  
Painting..... RAL 9005  
Nameplate..... Multivoltage  
Special packing..... No  
Special requirements..... No

## Test values

Rotor inertia (kgm²)..... 0,034  
Noise level (dB(A))..... 61  
No load current (A)..... 5,10  
Winding resist. (ohm)..... 1,96  
Starting time (sec.)..... 0,06  
Temp. rise winding (K)..... 49  
Temp. rise surface (K)..... 42

Rated power (kW)	5,50	5,35	6,60	6,40
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	10,8 6,25	11,0 6,40	10,8 6,25	11,0
Speed (rpm)	1460	1460	1750	1750
Power factor cos(phi)	0,82	0,83	0,82	0,84
Efficiency, 100/75/50 (%)	89,6/ 89,9 /88,9	89,6/ 89,9 /88,9	89,6/ 89,9 /88,9	88,9/ 89,2 /88,1
Ist/In	8,75	7,70	8,75	8,05
Full load torque (Nm)	36,0	35,0	36,0	35,0
Tst/Tn	2,80	2,60	2,80	2,44
Tmax/Tn	3,00	2,80	3,00	2,60
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45