


# Data Sheet

Itemnumber.....: 5541801110

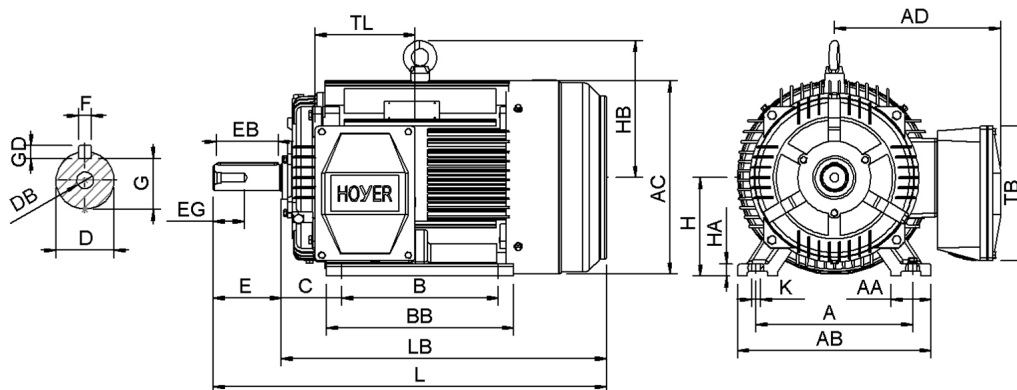

A = 279	AC = 354	BB = 349	DB = M16	EG = 40	GD = 9	HB = 237	LB = 614
AA = 70	AD = 292	C = 121	E = 110	F = 14	H = 180	K = 14,50	TB = 218
AB = 349	B = 279	D = 48	EB = 100	G = 42,50	HA = 22	L = 724	TL = 162

## Version

Type.....: HMC3 180L-4  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE3  
Pole.....: 4  
Power at 50 Hz (kW).....: 22,0  
Hz.....: 50  
Voltage.....: 400VD/690VY  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 22,0  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 180  
Mounting.....: B3  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Cast Iron  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 209

## Environment condition

Ambient temp. min. (°C)....: -20  
Ambient temp. max. (°C)....: 40  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6311-ZZ/C3  
NDE Bearing.....: 6311-ZZ/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Right  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M40x1,5  
Plastic blindcaps  
Accessory.....: 2 x M20x1,5  
Plastic blindcaps  
Terminal board thread.....: 6-M6

## Motor protection

Thermal protection main....: PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater.....: None  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: No

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage  
Special packing.....: No  
Special requirements.....: No

## Test values

Rotor inertia (kgm²).....: 0,23  
Noise level (dB(A)).....: 74  
No load current (A).....: 14,6  
Winding resist. (ohm).....: 0,36  
Starting time (sec.).....: 0,10  
Temp. rise winding (K).....: 53  
Temp. rise surface (K).....: 38

Rated power (kW)	22,0	21,4	26,5	25,5
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	38,5 22,4	40,0 23,0	38,5 22,4	40,0
Speed (rpm)	1470	1470	1760	1760
Power factor cos(phi)	0,88	0,89	0,88	0,90
Efficiency, 100/75/50 (%)	93,0/ 93,6 /92,4	93,0/ 93,6 /92,4	93,0/ 93,6 /92,4	92,5/ 93,2 /91,9
Ist/In	8,60	7,55	8,60	7,90
Full load torque (Nm)	142	138	142	138
Tst/Tn	2,80	2,60	2,80	2,44
Tmax/Tn	3,55	3,30	3,55	3,05
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45