

**Disclaimer:**  
Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

F12-040-MS-TV-S-000-L130-P0

F12-040



Pump & Motor Division Europe




F11 Motor



F12 Motor



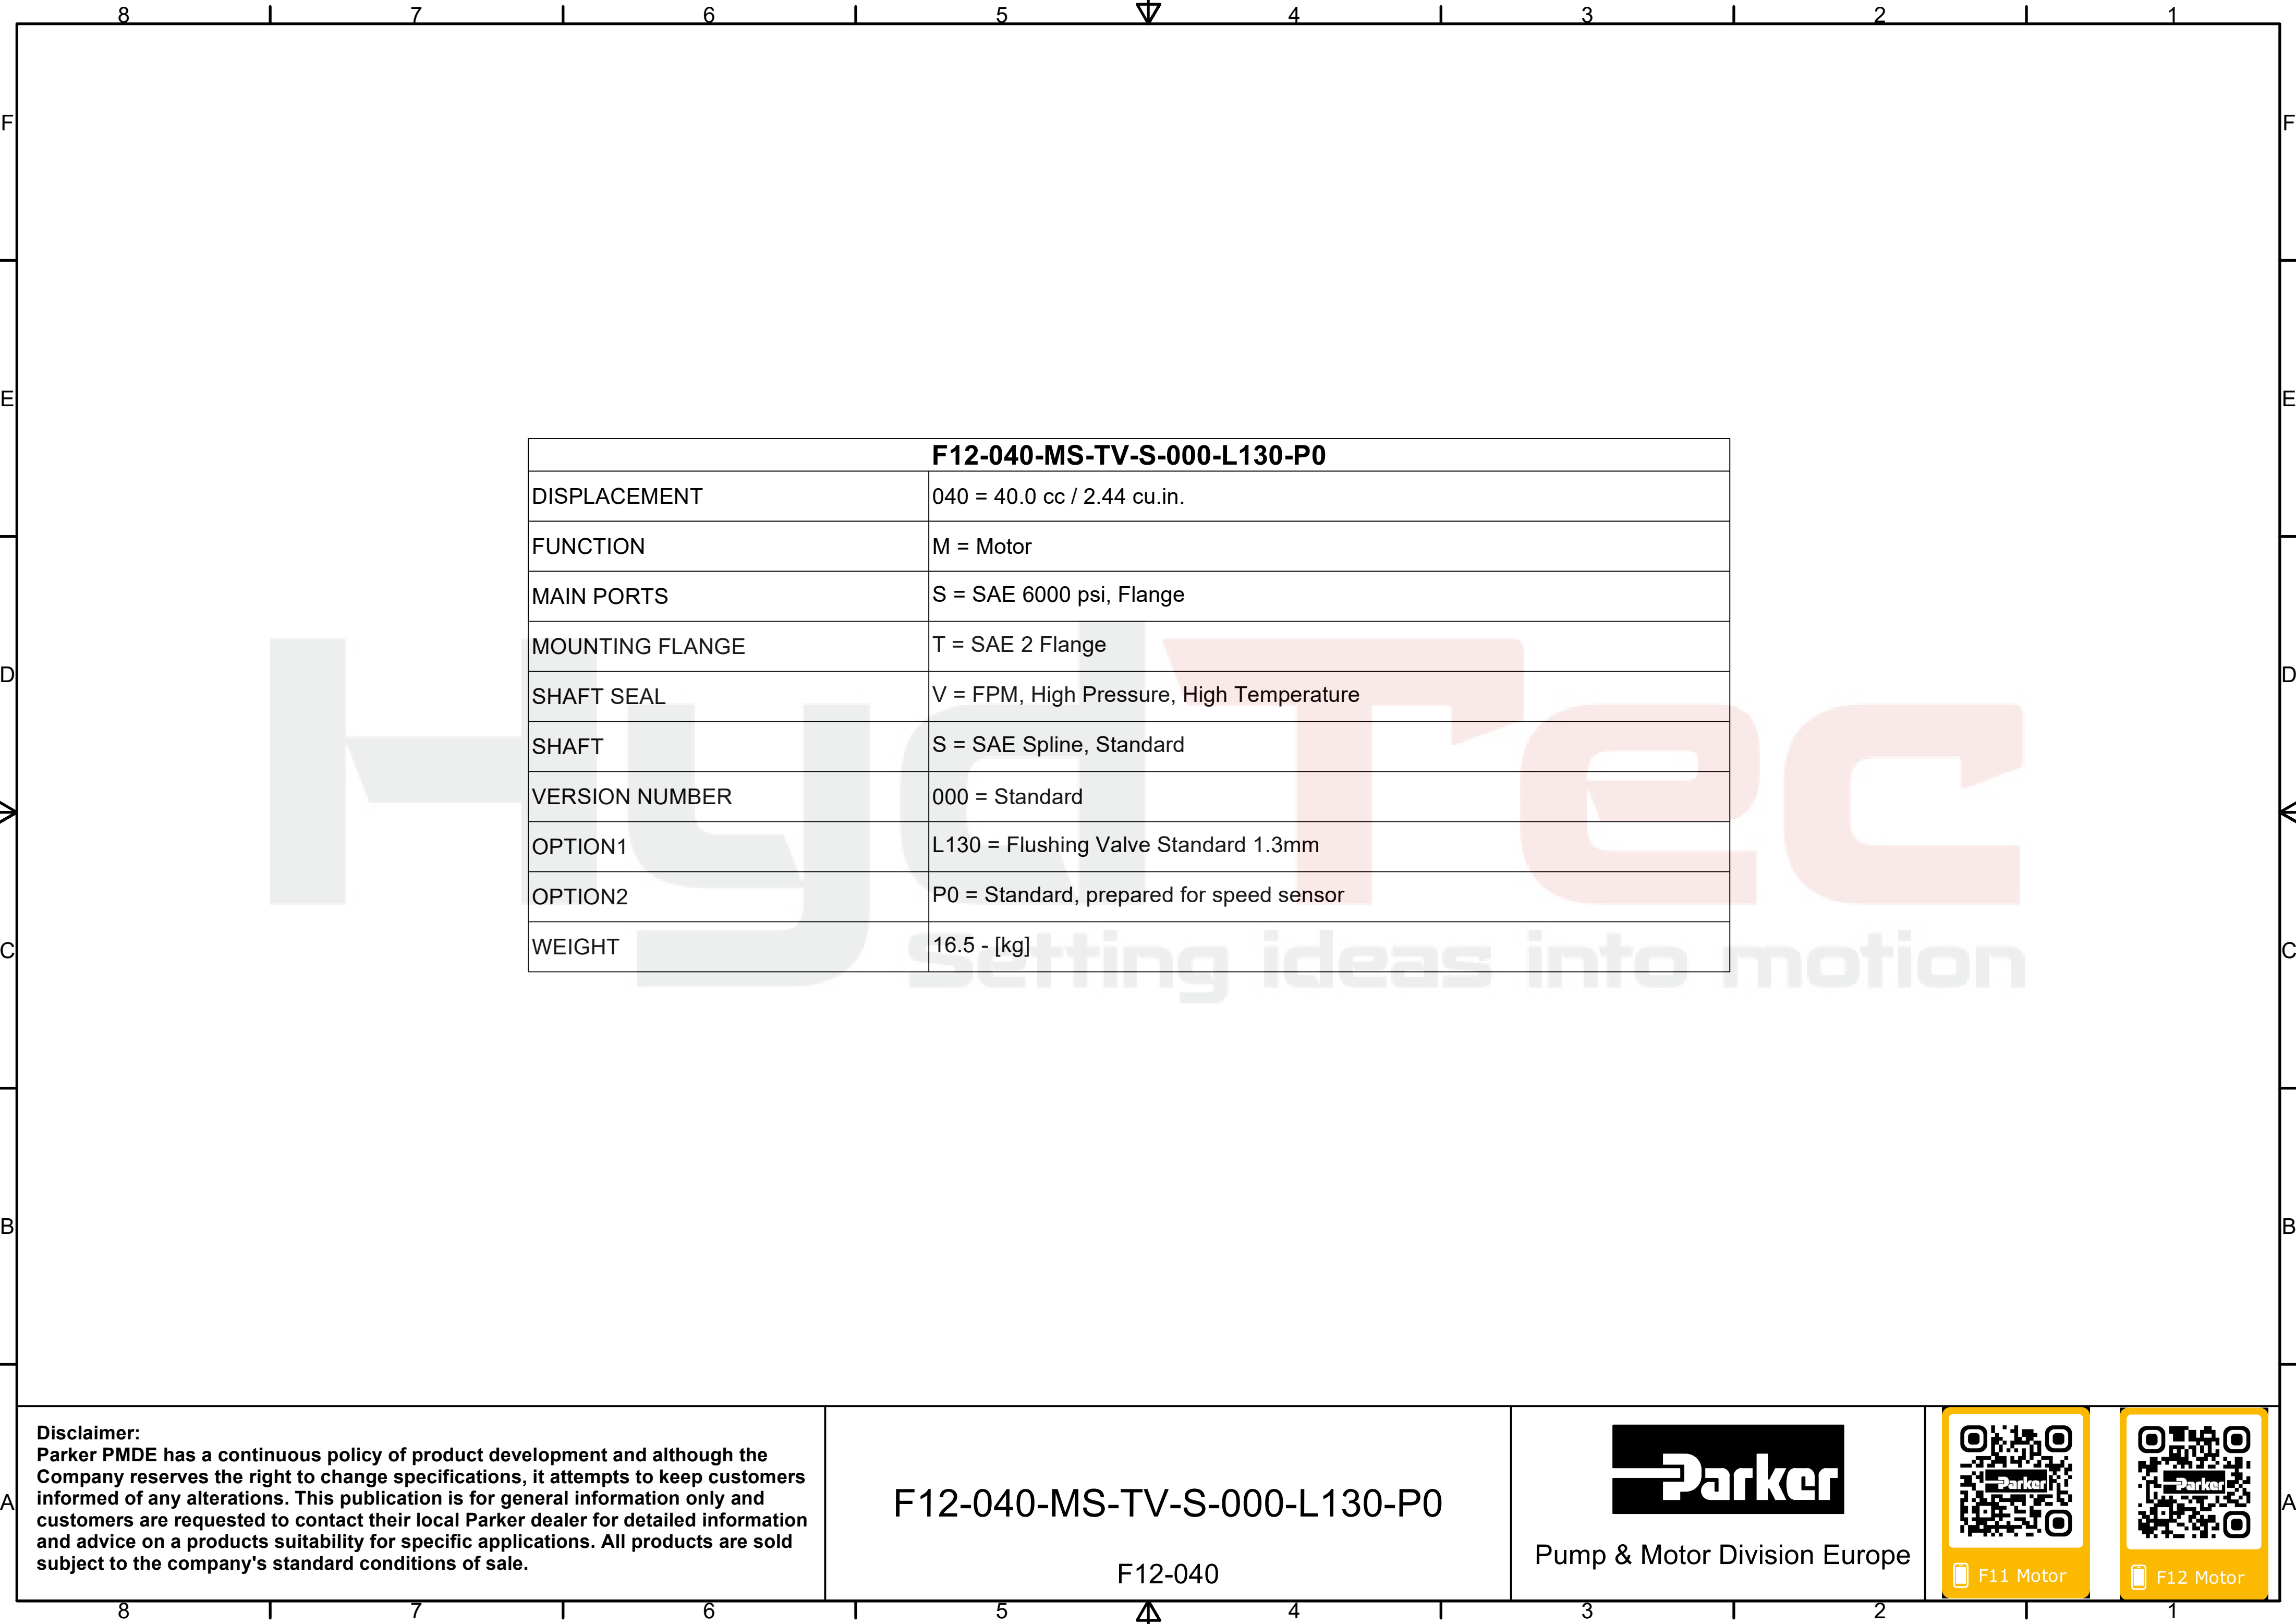

F12-040-MS-TV-S-000-L130-P0	
DISPLACEMENT	040 = 40.0 cc / 2.44 cu.in.
FUNCTION	M = Motor
MAIN PORTS	S = SAE 6000 psi, Flange
MOUNTING FLANGE	T = SAE 2 Flange
SHAFT SEAL	V = FPM, High Pressure, High Temperature
SHAFT	S = SAE Spline, Standard
VERSION NUMBER	000 = Standard
OPTION1	L130 = Flushing Valve Standard 1.3mm
OPTION2	P0 = Standard, prepared for speed sensor
WEIGHT	16.5 - [kg]

**Disclaimer:**  
Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

F 12-040-MS-TV-S-000-L 130-P0

F12-040



Pump & Motor Division Europe



F11 Motor



F12 Motor