


Data Sheet

Itemnumber.....: 3261600209

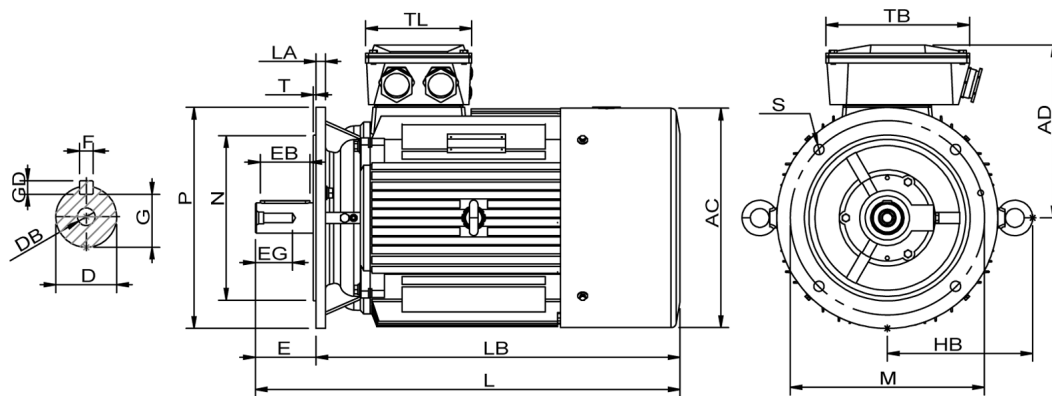

AC = 313	DB = M16	EG = 36	GD = 8	LA = 15	N = 250	T = 5
AD = 277	E = 110	F = 12	HB = 222	LB = 498	P = 350	TB = 218
D = 42	EB = 90	G = 37	L = 608	M = 300	S = 4-Ø18,5	TL = 162

Version

Type.....: HMC2 160M-6
Design.....: Induction motor
Standard series.....: IEC 60034
Phase / Voltage range.....: 3~ / Low

Electrical design

Efficiency.....: IE2
Pole.....: 6
Power at 50 Hz (kW).....: 7,50
Hz.....: 60 (60 Hz output)
Voltage.....: 440VD
Winding voltage.....: 400VD/690VY 50 Hz
Power output (kW).....: 8,75
Duty.....: S1
Insulation class.....: F
Temperature rise.....: B

Mechanical design

Frame size.....: 160
Mounting.....: B5
Rain cap.....: No
Protection class.....: IP55
Cooling method.....: IC411/TEFC
External grounding.....: Yes
Drain hole.....: Yes
Frame material.....: Cast Iron
Material approval.....: None
Shaft.....: IEC Standard
Key.....: Closed key
Balancing.....: Half key balancing
Vibration class.....: Grade-A
Weight (kg).....: 125

Environment condition

Ambient temp. min. (°C)....: -20
Ambient temp. max. (°C)....: 45
Altitude (mtr up to).....: 1000

Bearing

DE Bearing.....: 6309-ZZ/C3
NDE Bearing.....: 6309-ZZ/C3
Fixed bearing.....: DE

Terminal box

Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
Main.....: 2 x M40x1,5
Ø22-30mm metal
Accessory.....: 2 x M20x1,5
Metal blindcaps
Terminal board thread.....: 6-M6

Test values

Rotor inertia (kgm²).....: 0,12
Noise level (dB(A)).....: 62
No load current (A).....: 8,45
Winding resist. (ohm).....: 0,76
Starting time (sec.).....: 0,07
Temp. rise winding (K).....: 49
Temp. rise surface (K).....: 36

Motor protection

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: 1x 230V 50W
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: Yes

Explosion protection

According to.....: None
Type of protection.....: None

General

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage + VFD
Special packing.....: No
Special requirements.....: No

Rated power (kW)	7,50	7,30	9,00	8,75
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	16,2 9,45	16,8 9,75	16,2 9,45	17,0
Speed (rpm)	970	970	1160	1160
Power factor cos(phi)	0,76	0,77	0,76	0,79
Efficiency, 100/75/50 (%)	87,2/ 87,5 /86,1	87,2/ 87,5 /86,1	87,2/ 87,5 /86,1	86,3/ 86,7 /85,1
Ist/In	6,55	5,75	6,55	6,05
Full load torque (Nm)	74,0	72,0	74,0	72,0
Tst/Tn	2,70	2,50	2,70	2,34
Tmax/Tn	2,60	2,42	2,60	2,26
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45