


# Data Sheet

Itemnumber....: 5523150200

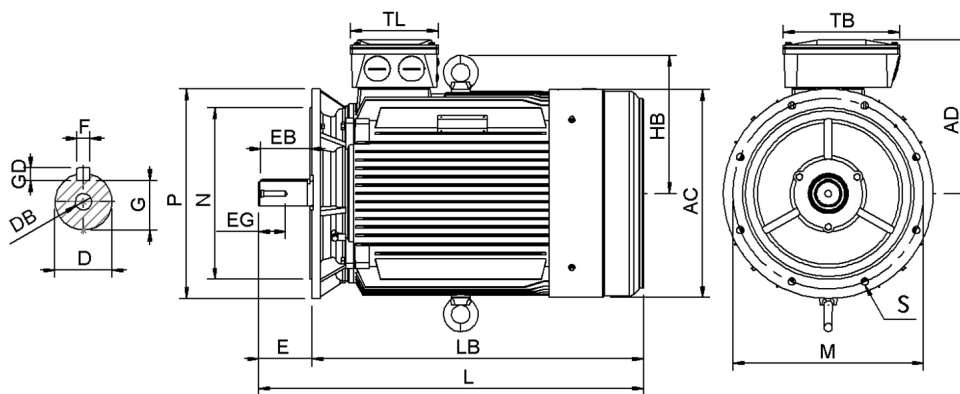

AC = 618	DB = M20	EG = 56	GD = 11	LA = 22	N = 550	T = 6
AD = 546	E = 140	F = 18	HB = 430	LB = 1053	P = 660	TB = 420
D = 65	EB = 130	G = 58	L = 1193	M = 600	S = 8-Ø24	TL = 299

## Version

Type.....: HMC3 315S-2  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE3  
Pole.....: 2  
Power at 50 Hz (kW).....: 110  
Hz.....: 50  
Voltage.....: 400VD/690VY  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 110  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 315  
Mounting.....: B5  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Cast Iron  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 866

## Environment condition

Ambient temp. min. (°C)....: -20  
Ambient temp. max. (°C)....: 40  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6317/C3  
NDE Bearing.....: 6317/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Top  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M63x1,5  
Plastic blindcaps  
Accessory.....: 2 x M20x1,5  
Plastic blindcaps  
Terminal board thread.....: 6-M16

## Motor protection

Thermal protection main....: PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater.....: None  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: No

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage  
Special packing.....: No  
Special requirements.....: No

## Test values

Rotor inertia (kgm²).....: 1,71  
Noise level (dB(A)).....: 85  
No load current (A).....: 45,5  
Winding resist. (ohm).....: 0,029  
Starting time (sec.).....: 0,77  
Temp. rise winding (K).....: 61  
Temp. rise surface (K).....: 38

Rated power (kW)	110	106	132	128
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	180 104	186 108	180 104	186
Speed (rpm)	2980	2980	3580	3580
Power factor cos(phi)	0,93	0,94	0,93	0,94
Efficiency, 100/75/50 (%)	95,2/ 95,1 /94,4	95,2/ 95,1 /94,4	95,2/ 95,1 /94,4	94,9/ 94,8 /94,0
Ist/In	7,40	6,50	7,40	6,80
Full load torque (Nm)	355	340	355	340
Tst/Tn	2,10	1,96	2,10	1,82
Tmax/Tn	2,80	2,60	2,80	2,42
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45