


Data Sheet

Itemnumber..... 5541800200

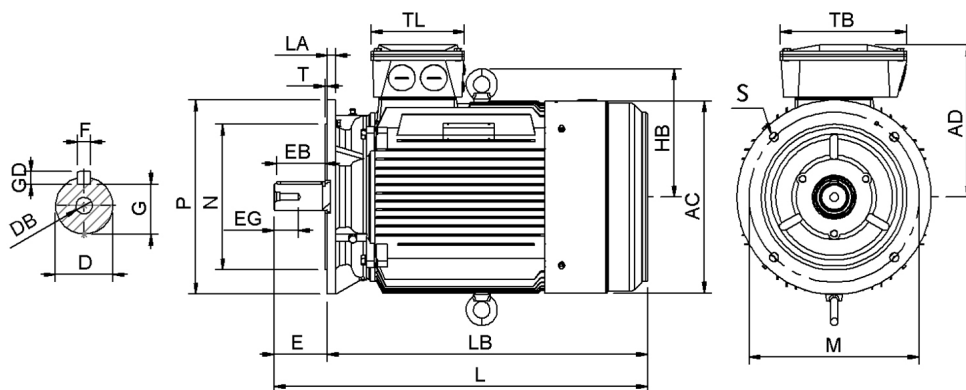

AC = 354	DB = M16	EG = 40	GD = 9	LA = 15	N = 250	T = 5
AD = 292	E = 110	F = 14	HB = 237	LB = 576	P = 350	TB = 218
D = 48	EB = 100	G = 42,50	L = 686	M = 300	S = 4-Ø18,5	TL = 162

Version

Type..... HMC3 180M-4
Design..... Induction motor
Standard series..... IEC 60034
Phase / Voltage range..... 3~ / Low

Electrical design

Efficiency..... IE3
Pole..... 4
Power at 50 Hz (kW)..... 18,5
Hz..... 50
Voltage..... 400VD/690VY
Winding voltage..... 400VD/690VY 50 Hz
Power output (kW)..... 18,5
Duty..... S1
Insulation class..... F
Temperature rise..... B

Motor protection

Thermal protection main.... PTC 3x 155 dgr
Thermal protection second.. None
Space heater..... None
Temperature detector..... No
SPM..... No
IR wire..... No
Tropical insulation..... No

Explosion protection

According to..... None
Type of protection..... None

General

Direction of rotation..... CW
Painting..... RAL 9005
Nameplate..... Multivoltage
Special packing..... No
Special requirements..... No

Mechanical design

Frame size..... 180
Mounting..... B5
Rain cap..... No
Protection class..... IP55
Cooling method..... IC411/TEFC
External grounding..... Yes
Drain hole..... Yes
Frame material..... Cast Iron
Material approval..... None
Shaft..... IEC standard
Key..... Closed key
Balancing..... Half key balancing
Vibration class..... Grade-A
Weight (kg)..... 179

Environment condition

Ambient temp. min. (°C).. -20
Ambient temp. max. (°C).. 40
Altitude (mtr up to)..... 1000

Bearing

DE Bearing..... 6311-ZZ/C3
NDE Bearing..... 6311-ZZ/C3
Fixed bearing..... DE

Terminal box

Tbox position..... Top
Cable entry direction..... Right (from DE)
Cable entry
Main..... 2 x M40x1,5
Plastic blindcaps
Accessory..... 2 x M20x1,5
Plastic blindcaps
Terminal board thread..... 6-M6

Test values

Rotor inertia (kgm²)..... 0,19
Noise level (dB(A))..... 73
No load current (A)..... 12,2
Winding resist. (ohm)..... 0,47
Starting time (sec.)..... 0,09
Temp. rise winding (K)..... 55
Temp. rise surface (K)..... 37

Rated power (kW)	18,5	18,0	22,2	21,6
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	32,5 19,0	33,5 19,6	32,5 19,0	33,5
Speed (rpm)	1470	1470	1760	1760
Power factor cos(phi)	0,88	0,89	0,88	0,89
Efficiency, 100/75/50 (%)	92,6/ 93,2 /91,8	92,6/ 93,2 /91,8	92,6/ 93,2 /91,8	92,1/ 92,7 /91,2
Ist/In	8,15	7,15	8,15	7,50
Full load torque (Nm)	120	116	120	116
Tst/Tn	2,65	2,48	2,65	2,30
Tmax/Tn	3,45	3,20	3,45	3,00
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45